



Training Customers Since 1980 at Your Location & Ours

Sky Climber offers 1, 2, 3 and 4 day courses on:

SAFETY, Operator and Application Training including theory, hands-on instruction, demonstrations, top side rigging and actual bench experience.

SERVICE and Repair Training to learn technical aspects of hoist inspections, troubleshooting, repair and service. Use factory established methods to certify and recertify your equipment.

SOLUTIONS that help you every day as you learn from instructors with 50+ years of industry experience.

Customize Courses To Meet Your Needs. Call Sky Climber at 800-255-4629 for details.

Training Videos Available

Sky Lock Secondary Safety Brakes... Outside Power Not Needed.



Sky Lock III

Use On
CX 1250
Alpha 1000
Compact 750
Model 4
Wt. 12 lbs.

Part No. 56009839

OSHA requires an independent secondary brake such as the Sky Lock to be attached to every hoist sold and operated. ALL Sky Climber hoists come complete with the Sky Lock.

Sky Lock II

Use On
Alpha 1500
Alpha 800
Wt. 15 lbs.

Part No. 56009826



Protect Your Equipment

Steel Storage & Shipping Box

Size 17 1/2" w x 21" l x 25" h
Part No. 800-6
Weight 40 lbs.

Canvas Hoist Cover

Alpha 1000 42008106
Compact 750 42008106
CX 1250 42008106
Alpha 1500 41008150
Sky Lock III 305-67




Safety, Service, Solutions

THE ORIGINAL

SKY CLIMBER®

HOISTS • WORK PLATFORMS • RIGGING • TRAINING

Hoists
We've Got One
To Lift Your Load

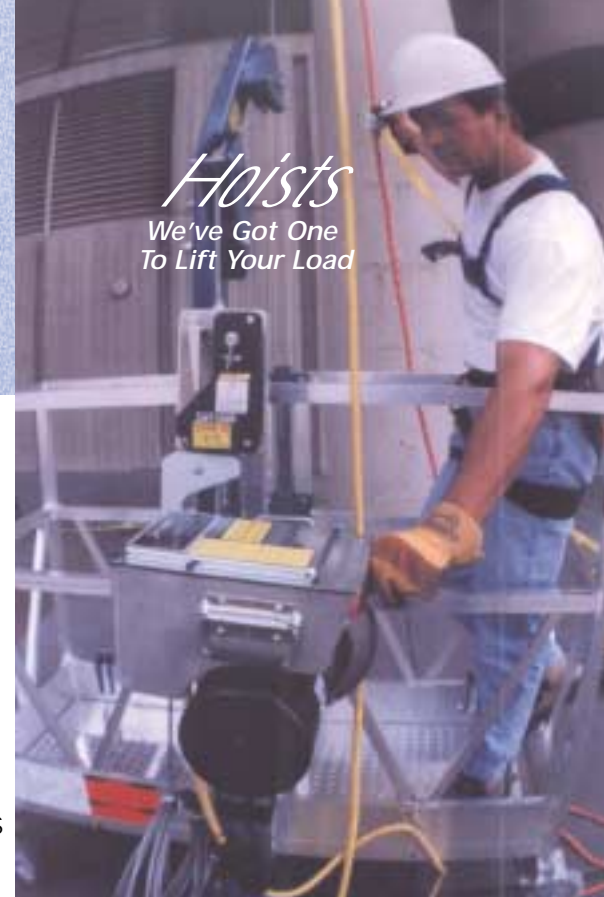

CX 1250

Weighs Less and Lifts More

	Electric Single 220V	Air
Load Rating:	1250/1000 lbs.	1250/1000 lbs.
Hoist Self-Weight:	96 lbs.	76 lbs.
Height:	30 in.	30 in.
Width:	13 1/2 in.	13 1/2 in.
Length:	17 3/4 in.	17 3/4 in.
Ascent (Up):	33 ft./min.	30 ft./min.
Descent (Down):	35 ft./min.	35 ft./min.
Emergency Desc:	36 ft./min.	14 ft./min.
Wire Rope Required:	5/16"	5/16"
Part No.	5x26WS; 4x26S KCE-CX-220	5x26WS; 4x26S KCA-CX-100



Electrical and Accessories

Pendant Controls & Drop Cords

For Alpha 1500 Electric Hoist

Single Phase

Size	Part No.
6 ft.	500-90-6
12 ft.	500-90-12
18 ft.	500-90-18
24 ft.	500-90-24

Three Phase

6 ft.	500-100
-------	---------



For Compact 750

Electric Single Volt

Size	Part No.
6 ft.	800-121-6
12 ft.	800-121-12
18 ft.	800-121-18
24 ft.	800-121-24

For Alpha 1000

Electric Single Volt

Size	Part No.
6 ft.	800-121-6
12 ft.	800-121-12
18 ft.	800-121-18
24 ft.	800-121-24

Pendant configured hoists require purchase of a pendant.

Single Volt	Part No.
6 ft.	800-121-6
12 ft.	800-121-12
18 ft.	800-121-18
24 ft.	800-121-24



Electric Drop Cord

Made of 10/3, reinforced, SOW electric cable, 20 amp, 250 volt twist lock connectors & weather proof covers. Strain relief at each end.

Length	Weight	Part No.
125 ft.	35 lbs.	127-35-125
250 ft.	70 lbs.	127-35-250

Booster Transformer

Provides a voltage boost from low voltage power supplies to the hoist.

Item	Weight	Part No.
220V 10% Boost	20 lbs.	126-182
110V 20% Boost	20 lbs.	126-357

Step-down Transformer

Provides 220V power to hoists and 110V GFCI protected power for hand tools. Built in circuit breaker, OSHA requires GFCI protected power for 110V hand tools operated on metal platforms.

Size	Weight	Part No.
1.5 KW (12 amp)	21 lbs.	126-277-5
3.0 KW (15 amp)	60 lbs.	126-277-6



Electric Yoke Assembly

Made of 10/3 type SOW electrical cable, 20 amp, 250 volt twist lock connectors.

Length	Weight	Part No.
30 ft.	11 lbs.	126-60-1
40 ft.	16 lbs.	126-60-2

Multiple Hoist Central Control (not pictured)

Allows simultaneous control of 2 hoists by one operator. Use with single volt Alpha 1000 or Compact 750 pendant controlled hoists. Part No. 126-652



Sky Climber Equipment meets or exceeds requirements made by agencies such as OSHA, CSA and CE

NOTE: Photos and diagrams are illustrative only. Some of the photographs contained herein may depict equipment in the process of being erected and consequently may not yet include all the appropriate elements for suspended work platforms. All products and equipment shall be used or offered for sale or rent only where permitted by law or government regulations, codes or ordinances and shall be used in strict conformity therewith and for the purposes and in the manner as may be prescribed therein and in conformity with safe practices.

Lightweight design for easy handling

COMPACT 750

	Electric Single 220V or Dual 110/200V	Air
Load Rating:	750 lbs.	750 lbs.
Hoist Self-Weight:	97 lbs.	76 lbs.
Height:	30 in.	30 in.
Width:	13 1/2 in.	13 1/2 in.
Length:	17 in.	19 in.
Ascent (Up):	32 ft./min.	32 ft./min.
Descent (Down):	35 ft./min.	35 ft./min.
Wire Rope Required:	5/16"	5/16"
Part No.	5x26WS; 4x26S	5x26WS; 4x26S
Single 220V	KCE-600-70	
Dual 110/220V	KCE-600-22	
W/ Pendant Control	KCE-600-80	
Air	KCA-600-51	



Durable and Versatile



	Electric Single 220V	Air
Load Rating:	1000 lbs.	1000 lbs.
Hoist Self-Weight:	129 lbs.	107 lbs.
Height:	30 in.	30 in.
Width:	13 1/2 in.	13 1/2 in.
Length:	17 3/4 in.	19 in.
Ascent (Up):	32 ft./min.	35 ft./min.
Descent (Down):	35 ft./min.	35 ft./min.
Wire Rope Required:	5/16"	5/16"
Part No.	5x26WS; 4x26S	5x26WS; 4x26S
Single 220V	KA10E-800-125	
Dual 110/220V	KA10E-800-21	
W/Pendant Control	KA10E-800-130	
Air	KA10A-800-51	



ALPHA 1500 Heavy Duty For Maximum Lift Capacity



	Electric 220 Volt/60 Hz	Air
Load Rating:	1500 lbs.	1500 lbs.
Hoist Self-Weight:	179 lbs.	149 lbs.
Height:	35 in.	35 in.
Width:	18 1/2 in.	18 1/2 in.
Length:	18 1/2 in.	16 1/2 in.
Ascent (Up):	30 ft./min.	24 ft./min.
Descent (Down):	30 ft./min.	29 ft./min.
Wire Rope Required:	3/8"	3/8"
Part No.	6x19S	6x19S
1 Phase	KA15E-500-21	
3 Phase	KA15E-500-31	
Air	KA15A-500-51	

Sky Climber Hoist Warranty

24-months factory warranty on all parts and labor, 36-months on geartrain parts and labor.

Sky Climber Products are Distributed By

Sky Climber, Inc.

1501 Rock Mountain Blvd.
Stone Mountain, Georgia 30083
Phone 800-255-4629 • 770-939-7705
Fax 770-493-7392

Email info@skyclimber.com • www.skyclimber.com

www.skyclimber.com

MKD

The easy modular way to rig from simple to sophisticated shapes
 Straight • Square • Circular • Inside Corners • Outside Corners • Multi-Tier

Length	Part No.	Std End Slirrup	Connect Frame	Floor Section			Side Section			Top Guardrail			Floor Attach Pin	Wall Roller
				10 ft.	5 ft.	2.5 ft.	10 ft.	5 ft.	2.5 ft.	10 ft.	5 ft.	2.5 ft.		
5 ft	111-415-05S	2	-	-	1	-	-	2	-	2	-	2	1	
7.5 ft	111-415-07.5S	2	1	-	1	1	-	2	-	2	2	3	1	
10 ft	111-415-10S	2	-	1	-	-	2	-	-	2	-	2	2	
12.5 ft	111-415-12.5S	2	1	1	-	1	2	-	2	2	-	2	2	
15 ft	111-415-15S	2	1	1	1	-	2	2	-	2	2	4	2	
17.5 ft	111-415-17.5S	2	2	1	1	1	2	2	2	2	2	5	2	
20 ft	111-415-20S	2	1	2	-	-	4	-	-	4	-	4	2	
22.5 ft	111-415-22.5S	2	2	2	-	1	4	-	2	4	-	2	5	2
25 ft	111-415-25S	2	2	2	1	-	4	2	-	4	2	-	6	2
27.5 ft	111-415-27.5S	2	3	2	1	1	4	2	2	4	2	2	7	2
30 ft	111-415-30S	2	2	3	-	-	6	-	-	6	-	-	6	2
32.5 ft	111-415-32.5S	2	3	3	-	1	6	-	2	6	-	2	6	2
35 ft	111-415-35S	2	3	3	1	-	6	2	-	6	2	-	8	2
37.5 ft	111-415-37.5S	2	4	3	1	1	6	2	2	6	2	2	9	2
40 ft	111-415-40S	2	4	3	2	-	6	4	-	6	4	-	10	2

- Unique pin design for easy assembly.
- Mix and Match components for smaller inventory, less storage.
- Sturdy lightweight aluminum and strong carbon steel construction.
- MKD Platform lengths up to 30 ft. have been approved by UL for a 1250 lb. rated load capacity.

Modular Corners allow MKD to conform to any shape with it's 15°•30°•45°•60° and 90° angles

Item	Part No:
90° Corner	111-455
60° Corner	111-465-60
45° Corner	111-465-45
30° Corner	111-465-30
15° Corner	111-465-15

2 Connecting Frames Part No. 111-410 are required for each corner.

Multi-tier Platforms are easy with MKD

MKD2

Folds to Fit...

- MKD2 is compact enough to fit through 18 in. openings in boilers and other hard to reach places.
- Components unfold to provide full-size platform and performance.
- Unique pin and hinge design for easy assembly and transportation.

Length	Part No.	Fld. End Slirrup	Connect Frame	Floor Section			Side Section			Top Guardrail			Floor Attach Pin	Wall Roller
				10 ft.	5 ft.	2.5 ft.	10 ft.	5 ft.	2.5 ft.	10 ft.	5 ft.	2.5 ft.		
5 ft	111-570-5S	2	-	-	1	-	-	2	-	4	-	2	1	
7.5 ft	111-570-7.5S	2	1	-	1	1	-	-	1	-	4	4	3	1
10 ft	111-570-10S	2	-	1	-	-	2	-	-	4	-	-	2	2
12.5 ft	111-570-12.5S	2	1	1	-	1	2	-	1	4	4	3	2	2
15 ft	111-570-15S	2	1	1	1	-	2	2	-	4	4	-	4	2
17.5 ft	111-570-17.5S	2	2	1	1	1	2	-	1	4	4	4	5	2
20 ft	111-570-20S	2	1	2	-	-	4	-	-	8	-	-	4	2
22.5 ft	111-570-22.5S	2	2	2	-	1	4	-	1	8	-	4	5	2
25 ft	111-570-25S	2	2	2	1	-	4	2	-	8	4	-	6	2
27.5 ft	111-570-27.5S	2	3	2	1	4	2	1	8	4	4	7	2	2
30 ft	111-570-30S	2	2	3	-	-	6	-	-	12	-	-	6	2
32.5 ft	111-570-32.5S	2	3	3	-	1	6	-	1	12	-	4	6	2
35 ft	111-570-35S	2	3	3	1	-	6	2	-	12	4	-	8	2
37.5 ft	111-570-37.5S	2	4	3	1	1	6	2	1	12	4	4	9	2
40 ft	111-570-40S	2	4	3	2	-	6	4	-	12	8	-	10	2

Do not use four (4) 10 ft. MKD sections to form a 40 ft. MKD work platform. To do so may result in equipment damage and possible serious injury.



MKD and MKD2

Available in 2.5 ft., 5 ft. and 10 ft. Increments

Dimensions	MKD	MKD2
Floor Width	24 in.	24 in. folds to 12 in.
Platform Outside Width	31 1/3 in.	31 1/3 in.
Top Rail Height	43 in.	43 in.
Midrail Height	27 in.	27 in.

MORE STAGES, CAGES & CHAIRS



MKD

Walk-by or Through

Material: Aluminum/Steel
 Load Rating: 1000 lbs.
 Dimensions: 43" h x 66" w x 31.5" d
 Weight: 235-285 lbs.
 Part No. 111-415-05C-1 (Walk-by)
 111-415-05C-2 (Sgl Line Walk Thru)
 111-415-05C-3 (Dbl Line Walk Thru)



Fold Up

Folds flat

Material: Steel
 Load Rating: 1000 lbs.
 Dimensions: 82" h x 70" w x 17.25" d
 Weight: 124 lbs.
 Part No. 106-196
 106-196X (Expanded Metal Floor)



Low Profile

Knocks Down

Material: Aluminium/Steel
 Load Rating: 1000 lbs.
 Dimensions: 53" h x 37" w x 34.5" d
 Weight: 102 lbs.
 Part No. 106-206
 106-203X (Expanded Metal Floor)



Bosun Chair

- Extra back support
- Wheels for easy transport
- 66" h x 22" w x 33" d
- Wt. 39 lbs.

Part No. 104-39



MKD Dual

- Offers OSHA required 42 in. work height on outside and lower 15 in. side panel on inside for more productivity.
- Offered with any MKD in-line configuration.
- To order, add the suffix "D" to an MKD part number.
 Example: 111-415-20 MKD 20' Stage: 111-415-20D MKD Dual 20' Stage


It's Easy To Contact Sky Climber at
 800-255-4629 or www.skyclimber.com

ROOF RIGGING

Rolling Roof Rigs



24 ft.
With Cable-Truss / Strongback

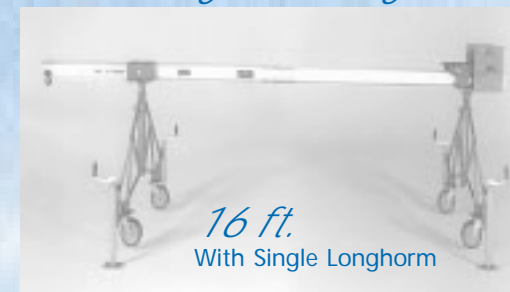

16 ft.
With Single Longhorn

Top Side Rigging



Ring Girder Roller



Parapet Clamp



Beam Saddle



Cornice Hooks



Tank Top Roller

Counterweight

ROLLING ROOF RIG	Weight	Load Capacity	Part No.
16 ft. Rolling Rig Pkg	423 lbs.		154-24-A
24 ft. Rolling Rig Pkg	483 lbs.		154-24-B
24 ft. Cable Truss Pkg	524 lbs.		154-24-C
PARAPET CLAMP	51 lbs.	1500 lbs.	149-71-7
16 in. Outreach			
Adjusts 4.75 in. - 35 in.			
CORNICE HOOK			
9 in.	21 lbs.	1000 lbs.	149-5
14 in.	38 lbs.	1000 lbs.	149-6
18 in.	41 lbs.	1000 lbs.	149-24
22 in.	54 lbs.	1000 lbs.	149-7
Standoff			119-25
RING GIRDER ROLLER	25 lbs.	1000 lbs.	154-10
LONGHORN	70 lbs.	1000 lbs.	154-25
COUNTERWEIGHT	50 lbs.		154-17
TANK TOP ROLLER	45 lbs.	1000 lbs.	154-3
BEAM SADDLE	25 lbs.	1000 lbs.	154-28



- Easy to move due to modular design
- Roof Rig configures in 8 ft. section
- Base support only weighs 56 lbs.
- Telescoping mast - to 5 ft. parapet wall
- Swivels 45°
- Heavy duty flat jacks for leveling under a load

Sky Climber

equipment meets or exceeds requirements made by agencies such as OSHA, CSA and CE