



SKY STAGE ULTRA

Sky Stage Ultra is a “third generation” modular platform that combines the best of current technology with new concepts. Sky Stage Ultra operates in any work environment including commercial restoration, painting, sandblasting, waterproofing, caulking, window cleaning, inspections, off-shore oil rigs, and general building maintenance.



SSU Standard



SSU Dance Floor




Moveable Stirrup

Features and Benefits

- Nearly 70 ft. in length with 10 ft. (3 m) cantilever & 2 point suspension.
 - Tested & UL approval pending
- A 49 ft. (15 m) span between suspension points.
- Stronger floor panels which are reversible and provide a more stable platform.
- Floor lifting handles to make dismantle easier, safer and quicker.
- Floor hold down tab retaining pins for easier dismantle.
- Telescoping posts with 4 levels of adjustment for more versatility.
- Top rail lock pin assembly to prevent accidental release and jamming.
- Compatibility with older platforms in the industry to afford fleet optimization.
- Moveable Walk-Through Stirrup for cantilever adjustment.
 - Modular design for easy storage, transport and replacement
 - Foldable bottom section, for flat storage
 - Lighter weight and wheels for easier transport
 - UL Rated for 1,250 lbs. rated load (pending)
 - Dual wire rope capability
 - Quick & easy installation that requires no tools
- An adjustable corner that is more versatile
 - 0,5,10,15,30,45,51,60,72,90 degrees



Moveable Stirrup, Adjustable Corner
1, 2, & 3 Meter Work Cages

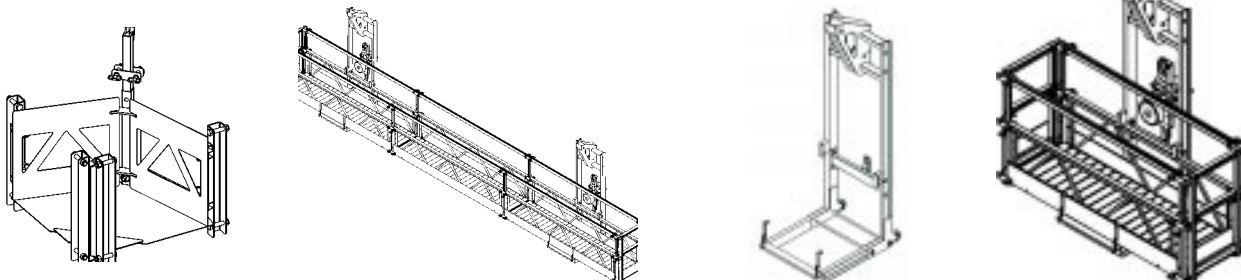

SKY CLIMBER, Inc. - 1501 Rock Mountain Blvd. - Stone Mountain - Georgia 30083 - U.S.A.
 Email: info@skyclimber.com - Tel: 770/939-7705 Fax: 770/493-7392

www.skyclimber.com

N.V. SKY CLIMBER EUROPE S.A.- Boomssteenweg 14 - 2630 Aartselaar - Belgium
 Email: info@skyclimber.be - Tel: +32 (0)3 887 81 20 - Fax: +32 (0)3 887 09 94

Here's how Sky Climber's Sky Stage Ultra measures up against the competition.

	SKY STAGE ULTRA	ALTREX MHB
Manufactured in USA	Yes	No
USA Based Engineering Support	Yes	No
Available Operator/Users Manual	Yes	No
Latching Floor Tab	Yes	No
Reversible Floor	Yes	No
Floor Handles	Yes	No
4 Position Guardrail Adjustment	Yes	No
Adjustable Corner Variables		
0 Degrees	Yes	No
5 Degrees	Yes	No
10 Degrees	Yes	No
15 Degrees	Yes	No
30 Degrees	Yes	Yes
45 Degrees	Yes	Yes
51 Degrees	Yes	Yes
60 Degrees	Yes	Yes
72 Degrees	Yes	Yes
90 Degrees	Yes	Yes
Guard Rail Attachment	Standard Lock Pin	Spring Button
Weight of 49 ft. (15 m) Platform	883 lbs. (401 kg)	938 lbs. (425 kg)
Weight of C-Stirrup	126 lbs. (57.1 kg)	140 lbs. (63.5 kg)
Weight of Adjustable Corner	132 lbs. (59.9 kg)	128 lbs. (58 kg)
Maximum (published) Platform Length	68 ft. (21 m)*	62 ft. (19 m)
49 ft. (15 m) Span Between Suspension Points	Yes	Yes
Telescoping Post	Yes	Yes
No Tool Assembly	Yes	Yes
1000 lbs. Load Rating for 40 ft. (12 m platform)	Yes	Yes
*with 3m cantilevers the maximum load rating is 250 lbs.		

SKY STAGE ULTRA SAFE WORKING LOAD ONLY FOR CONFIGURATIONS WITH END STIRRUPS									
Max. Safe Working Load (uniformly distributed)	Suspension		Instructions for actual safe working load				Suspension		Max. Safe Working Load (uniformly distributed)
	Distance	Self-Weight	Add working load limit of hoists. Compare working load limit of hoist with max. safe working load of platform. The LOWEST rating is the ACTUAL SAFE WORKING LOAD. Read 'Installation Instructions' prior to assembling.				Distance		
2000 lbs (900 kg)	6' 9" (2m)	249lbs (113kg)					584lbs (265kg)	(9m) 29'3"	1000 lbs (450kg)
	9' 9" (3m)	285lbs (129kg)					662lbs (300kg)	(10m) 33'0"	
	13' 6" (4m)	363lbs (164kg)					698lbs (316kg)	(11m) 36'0"	
	16' 6" (5m)	399lbs (181kg)					734lbs (333kg)	(12m) 39'0"	
1500 lbs (680 kg)	19' 6" (6m)	435lbs (197kg)					811lbs (368kg)	(13m) 42'9"	750 lbs (340kg)
	23' 3" (7m)	512lbs (232kg)					847lbs (384kg)	(14m) 45'9"	
	26' 3" (8m)	548lbs (249kg)					883lbs (401kg)	(15m) 48'10"	

Cantilever	0 - 1m		1 - 1.5m		1.5 - 2m		2 - 3m	
	Total Stage Ratings lbs	Cantilever Ratings lbs	Total Stage Ratings lbs	Cantilever Ratings lbs	Total Stage Ratings lbs	Cantilever Ratings lbs	Total Stage Ratings lbs	Cantilever Ratings lbs
5 - 6m	2000	500	-	-	-	-	-	-
6 - 7m	1500	500	-	-	-	-	-	-
7 - 8m	1500	500	1500	500	-	-	-	-
8 - 9m	1000	500	1000	500	-	-	1000	250
9 - 12m	1000	500	1000	500	1000	500	1000	250
12 - 15m	750	500	750	500	750	500	750	250

All Sky Stage Ultra platforms must be assembled as outlined in Sky Climber Configuration Tables. These are the tested and classified platform configurations. Connecting frame is never placed outside intermediate stirrup. Cantilever distance is the distance from the suspension point to the end of the stage not the distance from a part of the stirrup to the end of the stage. If the platform configuration you require is not listed on the chart, please contact Sky Climber for further assistance.